


Please consult your electrician for hanging fixture and wiring.




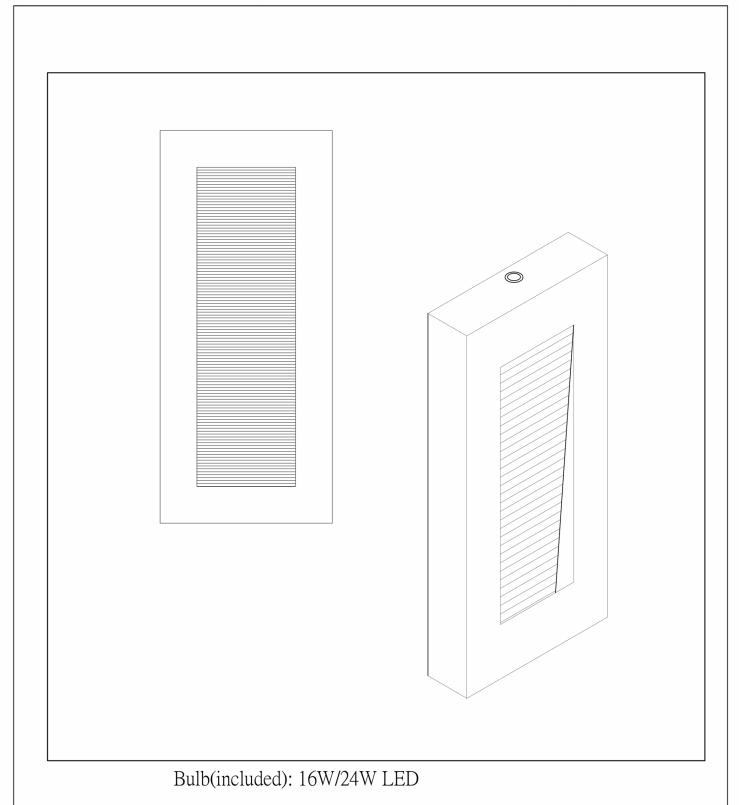


SM564354


Please consult your electrician for hanging fixture and wiring.

IMPORTANT: Turn off the power at the main fuse or circuit breaker box before starting installation




Locate all hardware & components before discarding packaging

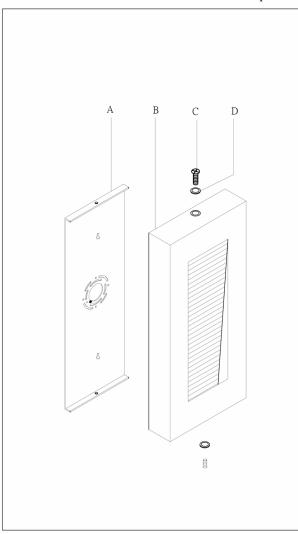



Step.1: Remove backplate (A) from fixture (B) and install it to electrical box. Wire fixture to wires in outlet box. Copper wire is for ground.



Step.2: Re-install fixture (B) to back-plate (A) and tighten worm screws (C) with rubber gasket (D) provided so that fixture meets the wall. Caulk around back plate where it meets the wall using outdoor silicone sealant.

## Cleaning & Care:

Clean with soft cloth and a mild detergent. Do not use abrasive cleaner.

Page 2 of (2)